



CUSTOM BUILT TO MEET YOUR SPECS

Keltech custom built tankless water heaters can accomplish most commercial fluid heating applications.

We custom build fluid heating solutions using quality control systems and premium materials to meet your specific needs.

Keltech commercial water heating solutions generally range in size and capacity from 208 to 480 volts, delivering output from 5kW to 25kW.

Not all capacities are available in all voltages, but Keltech is committed to providing a fluid heating application that meets your specs.



COMMERCIAL FEATURES:

- Flow range from .15 GPM to 6 GPM
- 480V 3-phase standard voltage
- Set point temperature range from 40°F to 160°F
- NEMA 12 standard
NEMA 4 optional
- Sheathed Incoloy Heating Elements
- Easy to install
– just add power and water
- Redundant control and safety features
- Energy efficient
– performs on-demand

HL 25kW 3-PHASE COMMERCIAL PROCESS HEATER *(continued)*



ELECTRICAL SPECIFICATIONS FOR THE HEATER

Model	Voltage	Amperage	kW	Minimum Wire Size
253	480	30	25	10 AWG

WATER FLOW AND TEMPERATURE RISE

kW	GPM	1	1.5	2	2.5	3	3.5	4
25	ΔT °F	170	114	85	68	57	49	43

HL 25kW 3-PHASE SUBMITTAL DRAWING

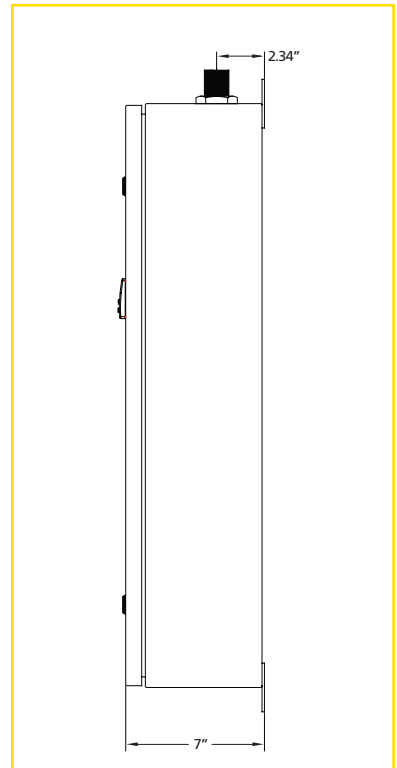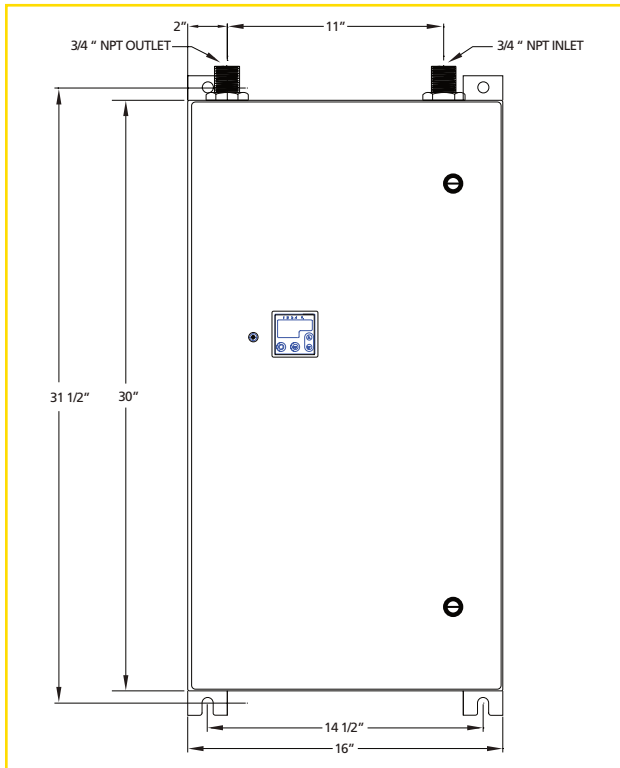

PROPRIETARY NOTICE:

These drawings are the exclusive property of Keltech, Inc. You may not reproduce, copy, use, or disclose this material, or the information illustrated or contained in it, in whole or in part, without prior written consent of Keltech, Inc.